


ONT: 4GE+WIFI(2.4GHZ+5GHZ)+CATV

MODELO G24AT

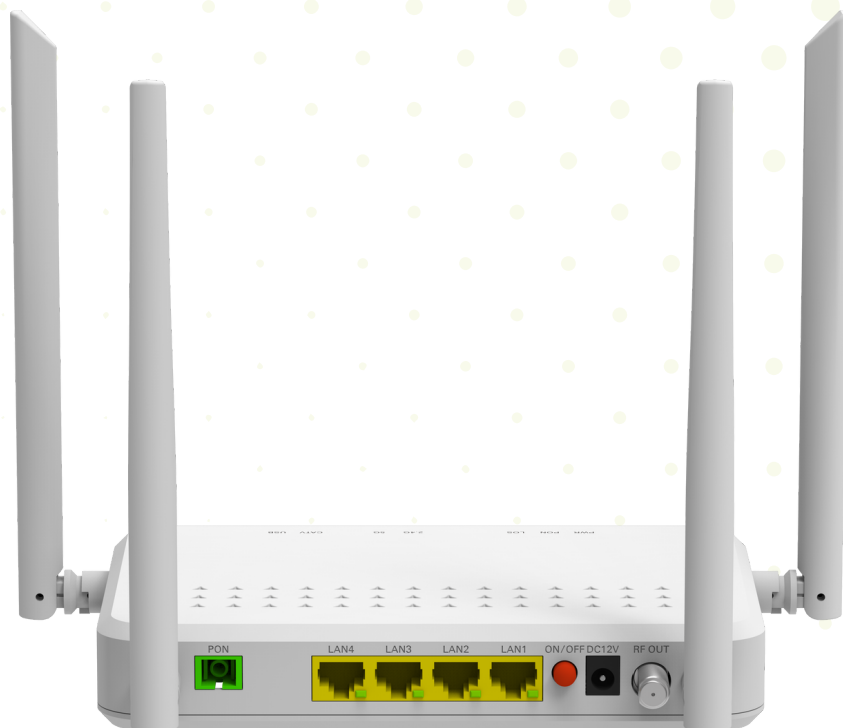

Key Features:


- XPON Dual Mode
- 2.4/5G dual band WiFi EasyMesh
- USB3 .0 SUPER SPEED
- O&M Management
- Support guaranteed QoS
- Support IPv4/ IPv6

Introduction:

G24AT (4GE+WiFi5+CATV+USB3.0 XPON ONT) is designed to meet the FTTH and triple play service requirements of fixed network operators. The ONT is based on high-performance chip solutions, supports XPON dual-mode technology (EPON and GPON), and also supports IEEE802.11b/g/n/ac WiFi technology and other Layer 2/Layer 3 functions, providing data service for carrier-grade FTTH applications. In addition, the ONT also supports the OAM/OMCI protocol, and we can configure or manage various services of the ONT on the OLT.

The ONT has high reliability and is easy to manage and maintain. It has QoS guarantees for different services. It complies with the China Telecom CTC2.1/3.0 and international technical standards such as IEEE802.3ah, ITU-T G.984, etc.

Application Chart:

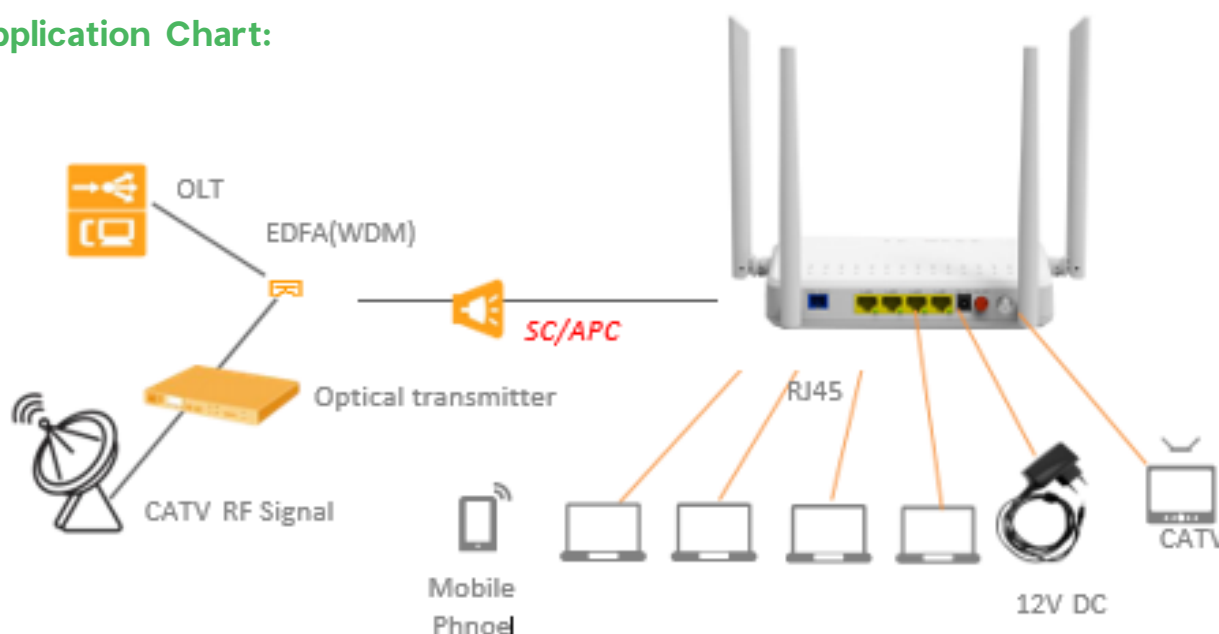

○ Hardware Parameter

Dimension	178mm×120mm×30mm(L×W×H)
Net weight	0.42Kg
Operating condition	- Operating temp: -10°C~+55°C - Operating humidity: 5%~95% (non-condensing)
Storing condition	- Storing temp: -40°C~+70°C - Storing humidity: 5%~95% (non-condensing)
Power adapter	DC 12V/1A
Power supply	≤10W
Interface	4GE+WiFi 5
LED Indicators	PWR, LOS, PON, LAN1 ~ LAN4, 2.4GHz, 5GHz

○ Interface Parameter

PON interface	1XPON port(EPON PX20+ & GPON Class B+) - SC single mode, SC/UPC connector - TX optical power: 0~+4dBm - RX sensitivity: -27dBm - Overload optical power: -3dBm(EPON) or -8dBm(GPON) - Transmission distance: 20KM - Wavelength: TX 1310nm, RX1490nm
WiFi interface	- Compliant with IEEE802.11b/g/n/ac - WiFi: 2.4GHz 2×2, 5.8GHz 2×2, 5dBi antenna, rate up to 1.167Gbps, Multiple SSID - TX power: 2.4GHz: 23dBm; 5GHz: 24dBm - RX power: 2.4GHz: HT40-MCS7 -72dBm; 5GHz: VHT80 MCS9 <-62dBm
User interface	4*GE, Auto-negotiation RJ45 connectors



O&M	- OAM/OMCI, Telnet, WEB, TR069 - Support full management of HGU functions by Lanly OLT
Connect Mode	Support bridge, router & bridge/router mixed mode
QoS	- Support 4 queues - Support SP, WRR, 802.1P and DSCP
Data Service Functions	- Full speed non-blocking switching 2K MAC address table 8 full range VLAN ID - Support VLAN tag, untag, transparent, trunk, translation mode - Integrated port monitoring, port mirroring, port rate limiting, port SLA, etc - Support auto polarity detection of Ethernet ports (AUTO MDIX) - Support IGMP v1/v2/v3 snooping/proxy and MLD v1/v2 snooping/proxy
Wireless	- Integrated 802.11b/g/n/ac - Authentication: WEP/WAP-PSK(TKIP)/WAP2-PSK(AES) - Modulation type: DSSS, CCK and OFDM - Encoding scheme: BPSK, QPSK, 16QAM and 64QAM - Easymesh
L3	- IPv4, IPv6 and IPv4/IPv6 dual stack - DHCP/PPPOE/Static - Static route, DHCP Server - NAT/DMZ/DDNS/Virtual Server
Security	- Support Firewall - Support Macfilter Based on MAC or URL - Support ACL

Ordering Information:

Product Name	Product Description	Accessories
G24A	4GE+WiFi5	AC-DC power adaptor: DC12V / 1A