

ONT: 4GE+AX3000+CATV

MODELO: G54XT30



G54XT30

4GE+CATV+2WIFI XPON ONU



High Speed CPU



Low Power Consumption



Software Customization




Optional Shell Supply

Brief Views

G54XT30 is an indoor fiber broadband access terminal. The device provides one GPON / EPON adaptive optical port and supports XPON mode. It can be used in connection with our company GPON OLT . It can also interconnect with the mainstream manufacture (Huawei / ZTE / Fiberhome) GPON or EPON OLT to provide users with Internet, WIFI and CATV services based on GPON and EPON technology.

Application Chart:

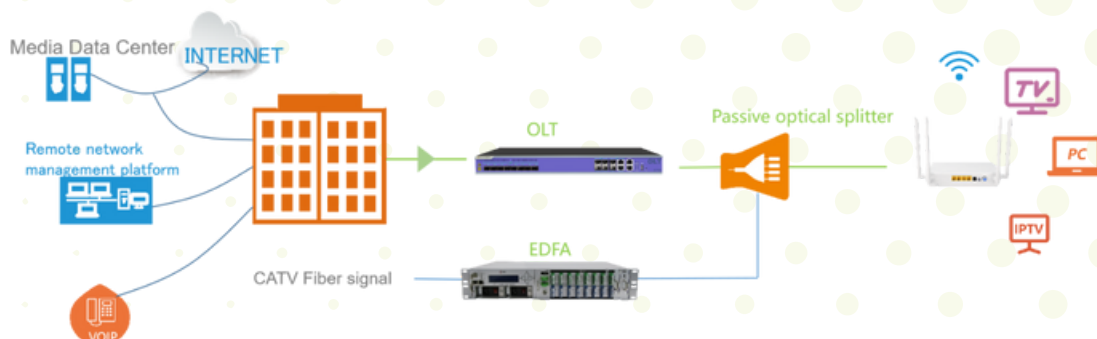

Functional Feature

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk
- Support broadcasting storm resistance function
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support remote WEB/Telnet access control
- Support remote CATV port management

Product Interface and LED



LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input;
LOS	PON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;
LAN1-4	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
INT	Internet status indicator	On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal.
WIFI	WIFI	Blinking :Data is being transmitted On:WIFI function Opens
CATV	CATV status	On: CATV optical normal Off:The CATV signals are not received

Product Specification

Mechanics			
Dimensions		210mm*135mm*45mm	
Weight		About 300g	
Hardware			
User Port (LAN)		RJ-45 connector	
		4 *10/100/1000Mbps adaptive Ethernet port	
		Full/half duplex	
		Auto MDI/MDI-X	
Indicators		PWR / PON / LOS / LAN1-4 / INT / CATV /WIFI	
PON Port	PON Mode	EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+	
	PON Rate	EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream	
	Wavelength	Transmit: 1310nm	Receiver: 1490nm
	Receiving sensitivity	EPON: -27dBm	GPON: -28dBm
	Saturated power	EPON: -3dBm	GPON: -8dBm
	Transmitting power	EPON:0~4dBm	GPON: 0.5~5dBm

CATV (Input /Output port)

Wavelength: 1550nm

Input optical power: -18dBm~0dBm(with AGC)

RF frequency: 47MHz~1000MHz

RF output level: 78dBuV (@-12~-2dBm@85MHz) (with AGC)

RF output return loss: >12dB(with AGC)

RF impedance: 75 Ω

WIFI performance parameter

IEEE802.11b/g/n/ax(2.4G) / IEEE802.11a/n/ac/ax(5G)

2.4G: 40Mhz bandwidth maximum rate 574Mbps

5G: 80Mhz bandwidth maximum rate 2402Mbps

Total wireless rate is 3000Mbps

2.4G EIRP:24dBm / 5 G EIRP:22dBm

Environment

Working temperature

0 to 40° C

Operating humidity

10% ~ 90% (Non-condensing)

Power

External 12VDC/1.5A power supply adapter

Power consumption

<18W